

DataLoop™ LI23 Series

Level Indicator



Application

The general purpose loop powered level indicator displays engineering units connected in series with one 4-20 mA continuous level transmitter. For field mount installation, add a single or two indicator NEMA box.



Features

- Easy configuration via the push button display module
- LCD main display with secondary unit and bar graph display
- DIN enclosure with NEMA 4X faceplate and shallow case
- Linear, square root and programmable exponent functions
- Non-volatile memory with security password protection
- Windowed NEMA box accessory for field installations
- Optional Solid-State Relays and 4-20mA Repeater Output

Key Benefits

- Bright backlit display for easy night viewing
- Capable of displaying units in gallons, liters, inches, feet, meters or percent of liquid
- Receives power and signal via the transmitters current loop with only a 1.5 VDC drop (4.5 VDC drop with backlight)

Compatible Products



LG10/LG11

ECHOWAVE®

Guided Wave Level
Transmitter



LU28

ECHOSONIC®

Ultrasonic Level
Transmitter



UG01

ECHOPOD®

Ultrasonic Level
Transmitter



LU83

ECHOSPAN®

Ultrasonic Level
Transmitter



LR15

ECHOPULSE®

Pulse Radar Level
Transmitter

DataLoop™ LI23 Series


Level Indicator



Specifications

Display type:	LCD, 5-digit top line 8-digit bottom line
Display units:	Engineering
Display output:	-9999 to 99999 (top) -9999999 to 99999999 (bottom)
Display height:	0.7" (17.8mm) top 0.4" (10.2) bottom
Decimal point:	Floating
Backlight:	LED
Configuration:	Push button
Memory:	Non-volatile
Sensor input:	(1) 4-20 mA transmitter
Loop power:	12-30 VDC
Voltage drop:	1.5 VDC w/o backlight 4.5 VDC w/ backlight
Process temp.:	F: -40° to 167° C: -40° to 75°
Ambient temp.:	F: -40° to 185° C: -40° to 85°
Enclosure type:	1/8 DIN, panel mount
Enclosure rating:	NEMA 4X (IP65) faceplate
Enclosure mat'l:	PPE & PS Blend
Faceplate mat'l:	Polycarbonate
Classification:	General purpose
Compliance:	CE

Dimensions

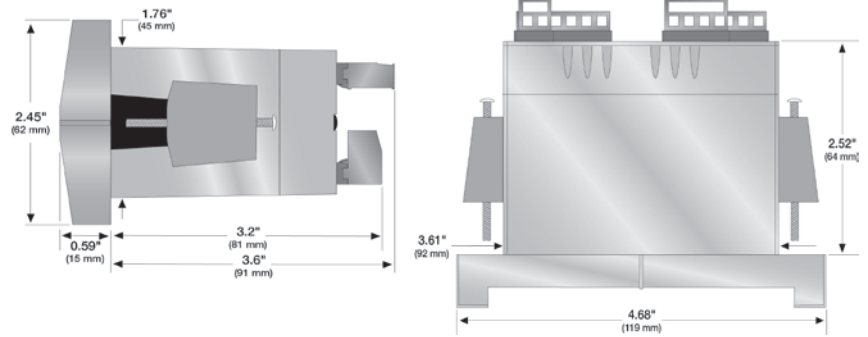

Accessories

Protect your field mounted display from the elements with the below recommended single or two indicator box. For reliable power, add a LC95 power supply.



P/N	DESCRIPTION
LM92-1002	Single indicator windowed, 1/8 DIN, PC



LM92-2002	Two indicator windowed, 1/8 DIN, PC
------------------	-------------------------------------



LC95-2001	100-240 VAC, 24 VDC @ 0.45A, 35mm rail
------------------	--

Ordering

LI23 - 1 1 (1)

CONFIGURATION

- 0 Display only
- 2 Display with 2 relays

REPEATER CONFIGURATION

- 0 No repeater
- 1 4-20 mA repeater

NOTES

- 1) For field mount installation in a NEMA 4X, polycarbonate windowed enclosure, order the single or two indicator box.